



HELICO CENTRIFUGAL EXTRACTOR FANS **SILENTE**



SO.ERRE



HELICO CENTRIFUGAL EXTRACTOR FANS SILENTE

• Centrifugal fans to extract air and fumes directly outside or through long ducts. Can be installed in holes with diameter 10, 12 and 15 cm. Low sound level with high performance. In ABS material.

In accordance with EN 60335-2-80.


• **Silente T** - With electronic timer adjustable from 2 to 20 minutes.

• **Silente HT** - The fan starts automatically when the humidity level in the room is higher than the pre-determined humidity level on the potentiometer which allow to adjust from 40% to 90%.


• **Silente Sensor** - The fan starts automatically when the infrared sensor detects a presence in the room, when the room is vacated the timer takes control keeping the fan operating for a preset time.

• **Silente 12 Volt** - In addition to the technical and functional features of the basic model it is manufactured with a very low power voltage (SELV).

• **Silente 12 Volt T**: With electronic timer adjustable from 2 to 20 minutes.

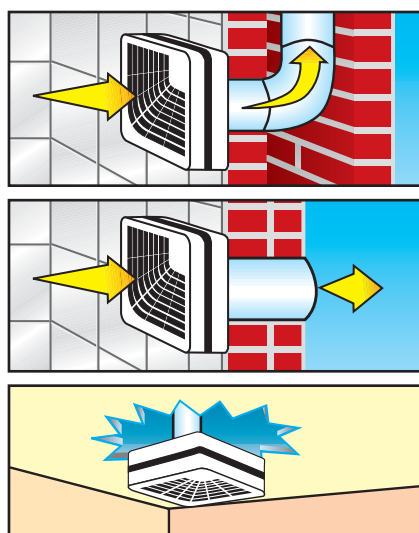

Dimensions

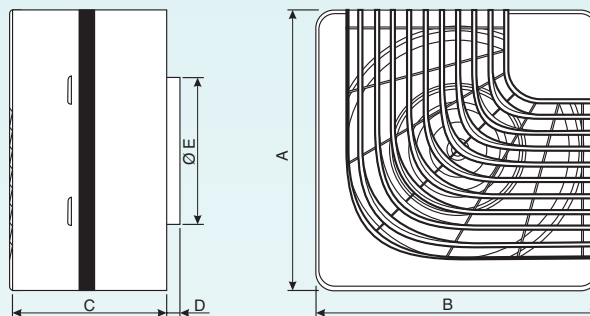


CE
IPX4



CL III
(Silente 12 V)

Model	A	B	C	D	E
All SILENTE models	184	184	101,5	8,5	∅ 98

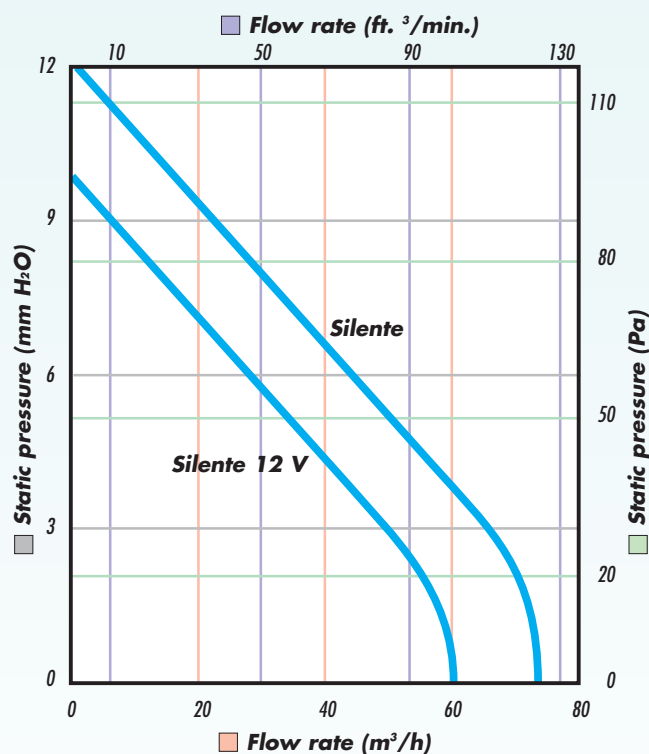

Technical Data

Model	Ref.	Hole diameter mm	Flow rate m ³ /h	W	Nominal voltage and frequency	Max pressure mm H ₂ O	dB (A) 3 m	Weight kg
SILENTE	OW 865 8	100÷150	75	19	220-240V 50Hz	12	36	0,9
SILENTE 12 Volt	OW 870 8	100÷150	60	15	220-240V 50Hz	10	36	0,9
SILENTE 12 Volt T	OW 871 6	100÷150	60	15	220-240V 50Hz	10	36	0,9
SILENTE T	OW 867 4	100÷150	75	19	220-240V 50Hz	12	36	0,9
SILENTE Sensor	OW 866 6	100÷150	75	19	220-240V 50Hz	12	36	0,9
SILENTE HT	OW 868 2	100÷150	75	19	220-240V 50Hz	12	36	0,9




HELICO CENTRIFUGAL EXTRACTOR FANS SILENTE

For all models


- Supplied with washable filter assuring long life of the motor and remarkable protection to the impeller.
- With anti-vibration gasket made of elastomer which fits on uneven surfaces and allows installation in holes with diameter 10, 12 and 15 cm.
- Quick installation as all components are clicked together.
- The template inside packaging allows a precise mounting on wall.
- The reduced protrusion of the exit spigot allows you to install the unit into ducting with curves placed immediately behind the exit hole.
- **Silente T** - Easy timer adjustment by small control knob.
- **Silente H** - Humidity level adjustable from 40% to 90% and electronic timer adjustable from 2 to 20 minutes. Both controls are adjusted by small knobs.
- **Silente Sensor** - It is extremely simple to install since it is connected to the electrical system with just two wires, thus eliminating the connections that normally need to be made to the light and the light switch. Easy timer adjustment by small control knob.



Low sound level.
36 decibel.



Splashproof fans for areas with high humidity.



The captive fixing screws in special cone shaped housing to allow for any necessary adjustment during installation in walls or ceiling.



Integral back draught shutter.

All components are clicked together.



Washable filter.

Anti-vibration gasket made of elastomer.