



AXIAL FANS - IPX4 STANDARD





AXIAL FANS - IPX4 STANDARD

- Axial fans to extract air and fumes directly outside.
- Can be wall, ceiling and panel mounted.
- Grille made in shining ABS material.
- In accordance with EN 60335-2-80.
- **Standard T (10-12-15)** - With electronic timer adjustable from 2 to 20 minutes approx.
- **Standard 8T** - With Timermatic (page 111).
- Standard models (10-12-15) can be installed on windows through an easy to use accessory window kit (further accessories see page 110).




Standard 10 Pull Cord,
switching on/off of the fan through a pull cord.



Window kit including fixing screws for installation on window (5 mm).

Dimensions

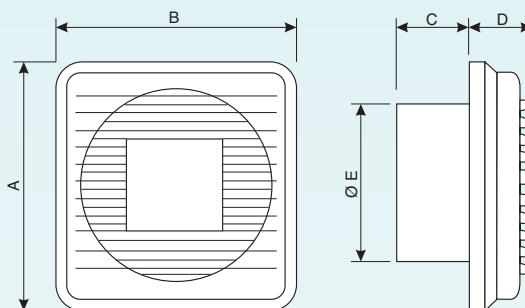

Model	A	B	C	D	E
Standard 8 / 8 T	123	123	58	24	∅ 75
Standard 10 / 10 T / 10 Pull Cord	154	154	45	34	∅ 98
Standard 12 / 12 T / 12 Pull Cord	174	174	45	34	∅ 118
Standard 15 / 15 T	210	210	62	40	∅ 146

Model	Ref.	hole diameter mm
Window kit 10	OW 874 0	135÷145
Window kit 12	OW 875 7	155÷165
Window kit 15	OW 876 5	186÷195

Technical Data

Model	Ref.	Hole diameter mm	Flow rate m ³ /h	W	Nominal voltage and frequency	Max pressure mm H ₂ O	dB (A) 3 m	Weight kg
STANDARD 8	OW 847 6	80÷100	35	15	220-240V 50Hz		36	0,4
STANDARD 8 T	OW 848 4	80÷100	35	15	220-240V 50Hz		36	0,4
STANDARD 10	OW 157 0	100	88	21	220-240V 50Hz	2,5	39	0,5
STANDARD 12	OW 158 8	120	125	23	220-240V 50Hz	4	39	0,65
STANDARD 15	OW 161 2	150	230	36	220-240V 50Hz	4,2	44	1
STANDARD 10 T	OW 159 6	100	88	21	220-240V 50Hz	2,5	39	0,5
STANDARD 12 T	OW 160 4	120	125	23	220-240V 50Hz	4	39	0,65
STANDARD 15 T	OW 164 6	150	230	36	220-240V 50Hz	4,2	44	1
STANDARD 10 Pull-Cord	OW 175 2	100	88	21	220-240V 50Hz	2,5	39	0,5
STANDARD 12 Pull-Cord	OW 947 4	120	125	23	220-240V 50Hz	4	39	0,65