



CENTRIFUGAL ROOF FANS  
*TX Plus*





# CENTRIFUGAL ROOF FANS


## TX Plus

- Centrifugal roof fans to extract air or fumes directly or from ducts.
- Medium - high flow rates with pressure to overcome pressure losses due to duct resistance.
- Induction motor on ball bearings, IP 55 protection, class F insulation and fitted with cooling impeller.
- Zinc-plated steel body and impeller, cover made of plastic material.
- Impeller statically and dynamically balanced.
- Safety protection grille.
- In accordance with the essential requirements of 89/392/CE directive concerning machines, and with European Standards EN 292 part I and II, UNI EN 294 and IEC 204-1 and 2.
- Some models can be regulated through the controllers of page 88.




### Accessories:

- See page 113.

### Dimensions

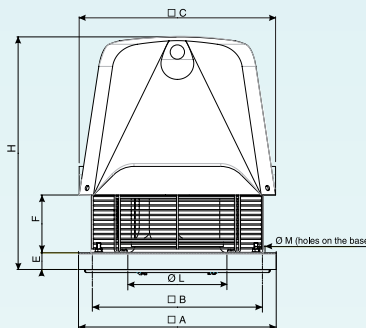

Model	□ A	□ B	□ C	E	F	H	∅ L	∅ M	Kg
TXP 3	400	350	412	40	135	493	200	11,2	14
TXP 6	400	350	412	40	135	493	250	11,2	18
TXP 7	560	460	560	40	240	608	300	11,2	25
TXP 8	560	460	560	40	240	608	350	11,2	30
TXP 10	710	610	740	40	253	638	400	11,2	40
TXP 12	900	800	950	40	305	910	500	11,2	57
TXP 14	900	800	950	45	300	910	550	11,2	76
TXP 15	900	800	950	45	300	910	600	11,2	96
TXP 18	900	800	950	45	300	910	600	11,2	110

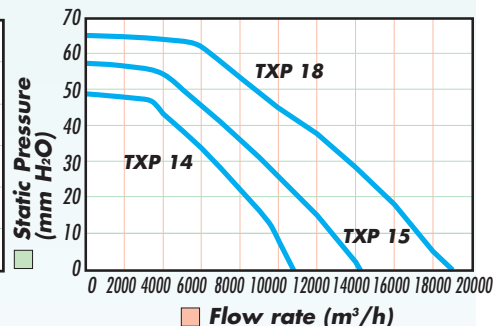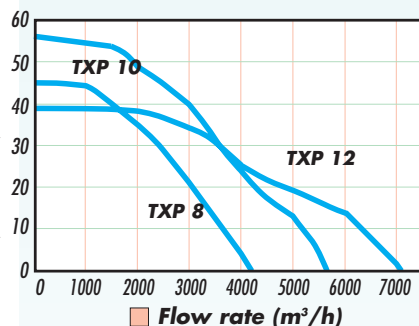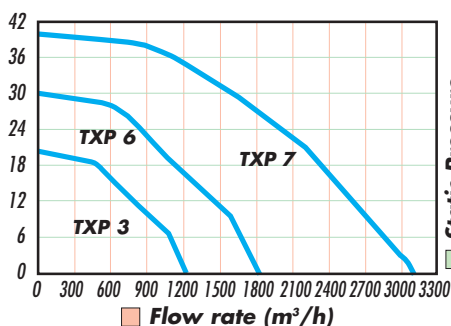

### Technical data

Model	Ref.	Motor Protection	Motor	Volt 50 Hz	Flow rate m³/h	Max Press. mm. H <sub>2</sub> O	N. Poles	W	Nom. curr. in A.		dB (A) 2 m	RPM
									at 230V	at 400V		
TXP 3M	741 1	IP55	single-phase	230	1200	20	4	120	0,81	-	60	1400
TXP 3T	746 0	IP55	three-phase	400/230	1200	20	4	120	0,81	0,47	60	1400
TXP 6M	742 9	IP55	single-phase	230	1800	30	4	180	1,05	-	66	1400
TXP 6T	747 8	IP55	three-phase	400/230	1800	30	4	180	1,05	0,60	66	1400
TXP 7M	743 7	IP55	single-phase	230	3100	40	4	250	1,40	-	69	1400
TXP 7T	748 6	IP55	three-phase	400/230	3100	40	4	250	1,42	0,82	69	1400
TXP 8M	744 5	IP55	single-phase	230	4200	45	4	370	1,90	-	70	1400
TXP 8T	749 4	IP55	three-phase	400/230	4200	45	4	370	1,90	1,10	70	1400
TXP 10M	745 2	IP55	single-phase	230	5700	56	4	750	3,40	-	75	1400
TXP 10T	750 2	IP55	three-phase	400/230	5700	56	4	750	3,40	1,80	75	1400
TXP 12T	751 0	IP55	three-phase	400/230	7100	39	6	750	3,81	2,20	71	900
TXP 14T	752 8	IP55	three-phase	400/230	10800	48	6	1100	5,37	3,10	75	900
TXP 15T	754 4	IP55	three-phase	400/230	14200	57	6	2200	9,35	5,40	80	900
TXP 18T	755 1	IP55	three-phase	400/230	18800	65	6	3000	11,95	6,90	84	900